



Prijemnik SR-1009-FA3

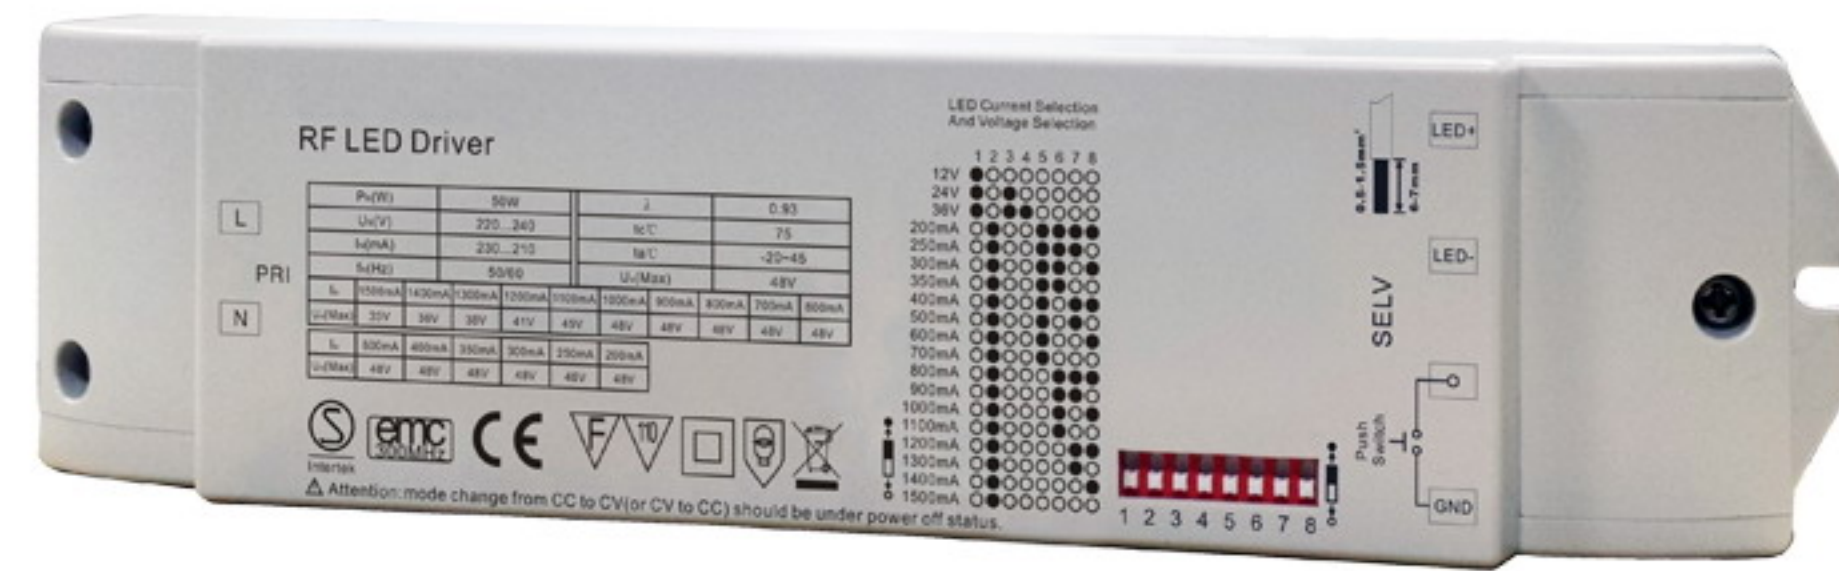

OPIS FUNKCIJA PROIZVODA

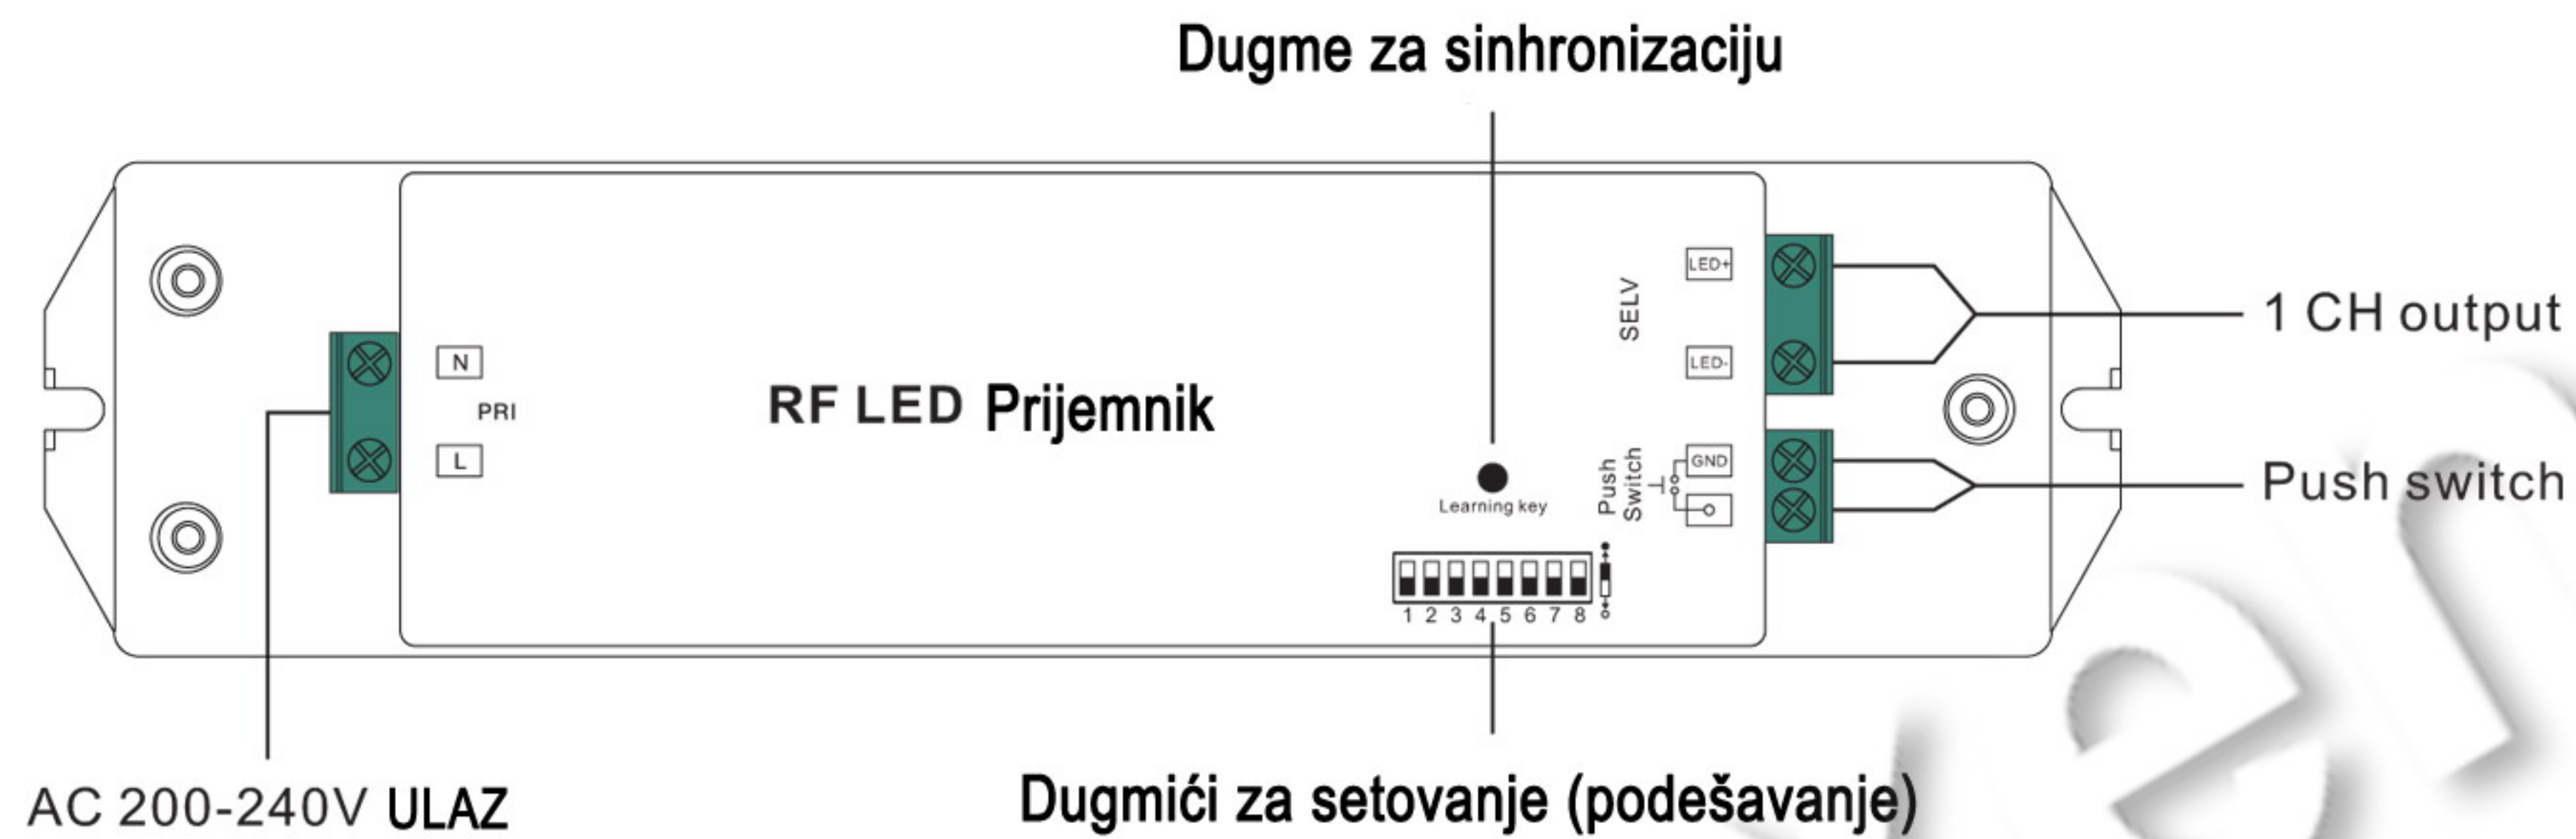

Podaci o proizvodu

Izlaz	Izabrana Struja	250mA	300mA	350mA	400mA	450mA	500mA	600mA	700mA
	DC Opseg Napona	15-48V	15-48V	15-48V	15-48V	15-48V	15-48V	15-48V	15-48V
Izlaz	Izabrana struja	800mA	900mA	1000mA	1100mA	1200mA	1300mA	1400mA	1500mA
	DC Opseg Napona	15-48V	15-48V	15-48V	15-46V	15-41V	15-38V	15-35V	15-33V
MAX Snaga		50W							
Ulaz	Napon	200-240V AC							
	Frekvencija	50/60Hz							


Dugmići za setovanje (postavljanje)



	1	2	3	4	5	6	7	8		1	2	3	4	5	6	7	8	
250mA	○	●	○	○	●	●	●	●		800mA	○	●	○	○	○	●	●	●
300mA	○	●	○	○	●	●	○	○		900mA	○	●	○	○	○	●	●	○
350mA	○	●	○	○	●	○	○	○		1000mA	○	●	○	○	○	○	○	○
400mA	○	●	○	○	○	○	○	○		1100mA	○	●	○	○	○	○	○	○
450mA	○	●	○	○	○	○	○	○		1200mA	○	●	○	○	○	○	○	○
500mA	○	●	○	○	○	○	○	○		1300mA	○	●	○	○	○	○	○	○
600mA	○	●	○	○	○	○	○	○		1400mA	○	●	○	○	○	○	○	○
700mA	○	●	○	○	○	○	○	○		1500mA	○	●	○	○	○	○	○	○

- * Dimabilni LED prijemnik
- * Max. snaga 50W
- * 1 kanal ima konstantnu struju na izlazu 250-1500mA
- * Pogodan za unutrašnju LED rasvetu

ŠEMA ZA POVEZIVANJE

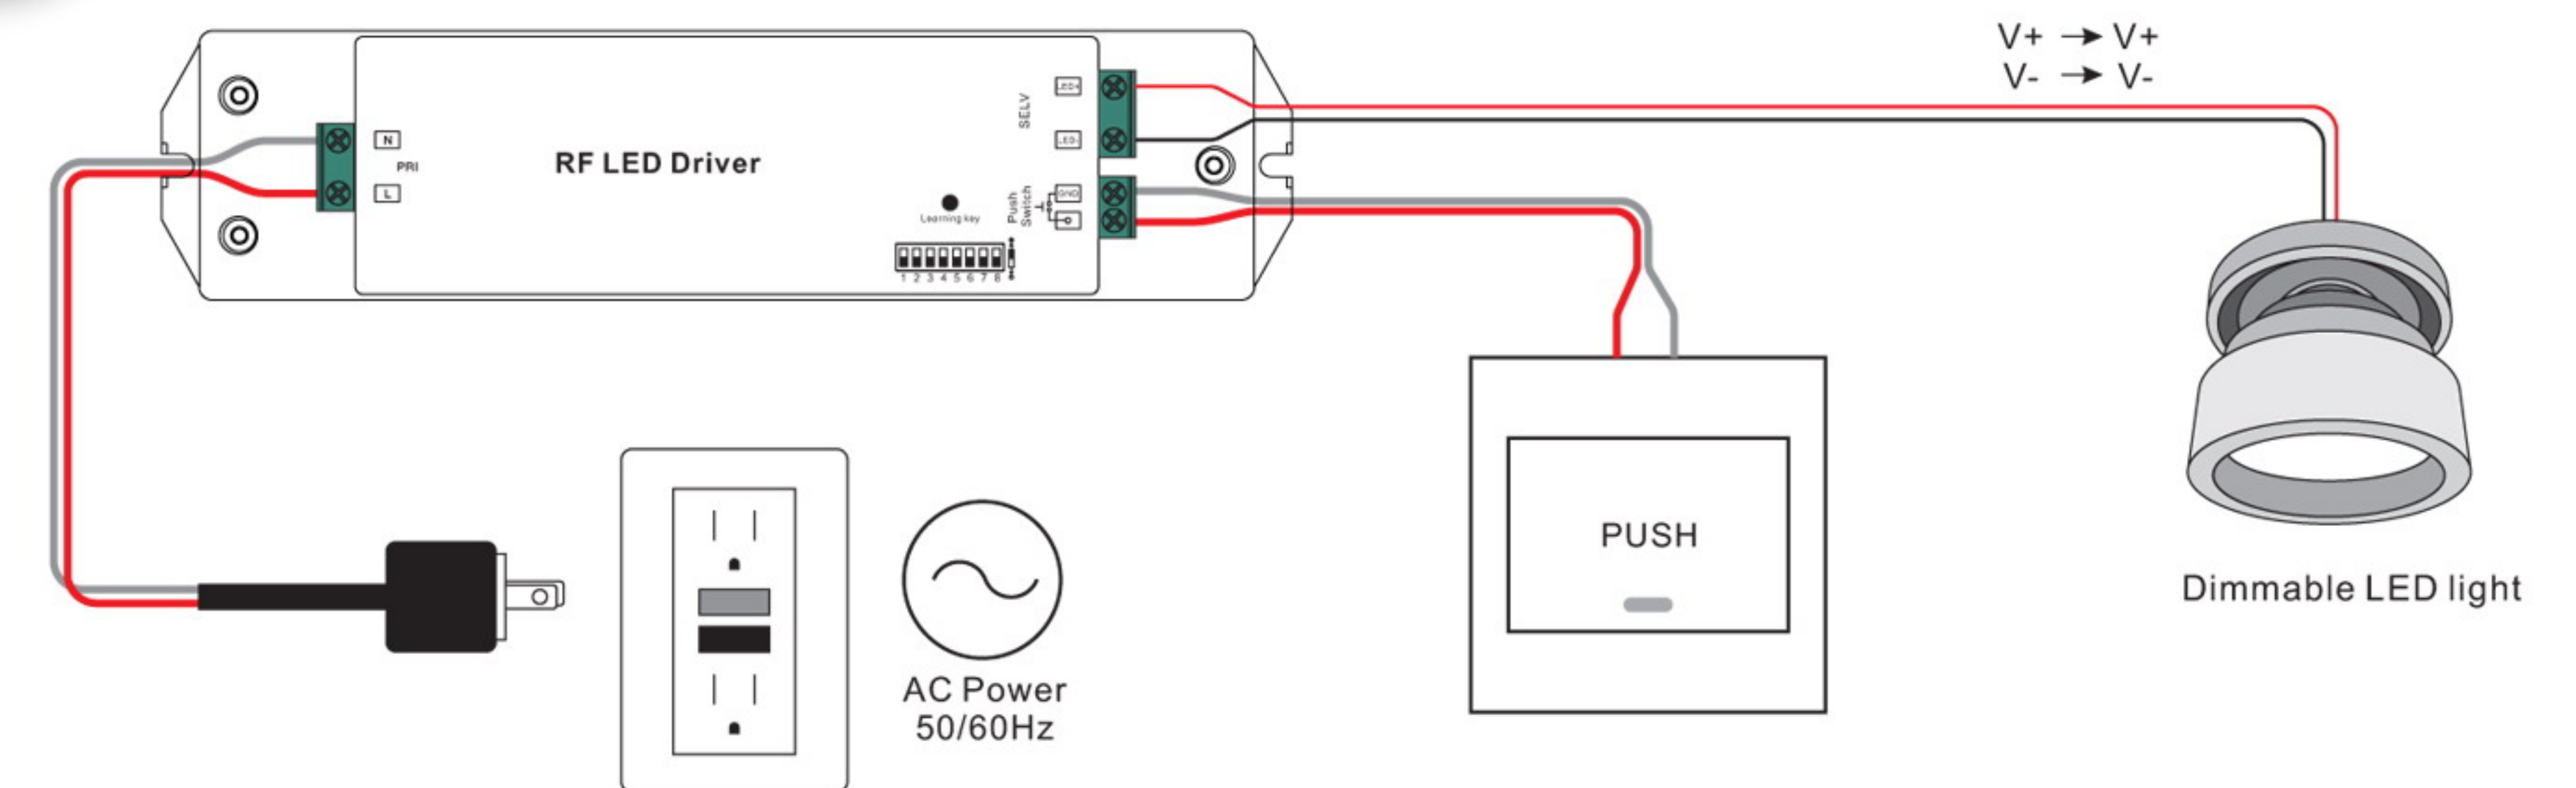

! NAPOMENE

Pre instalacije ili zamene obavezno isključiti dovod struje!
Instalaciju i zamenu treba da uradi kvalifikovani električar.
Ovaj proizvod radi isključivo na radni napon AC220V
Ne preopterećujte proizvod!

Ovo uputstvo, niti bilo koji njegov deo, ne sme se umnožavati niti na bilo koji način koristiti, prevoditi, adaptirati ili vršiti bilo kakve prepravke teksta, slika ili znakova bez saglasnosti društva XENON-LIGHT d.o.o. Beograd, koje zadržava sva prava na istom.

